


Fixture Type:	
Model Number:	
Project:	

## CCKX Series LED Combination Unit

### ORDERING GUIDE

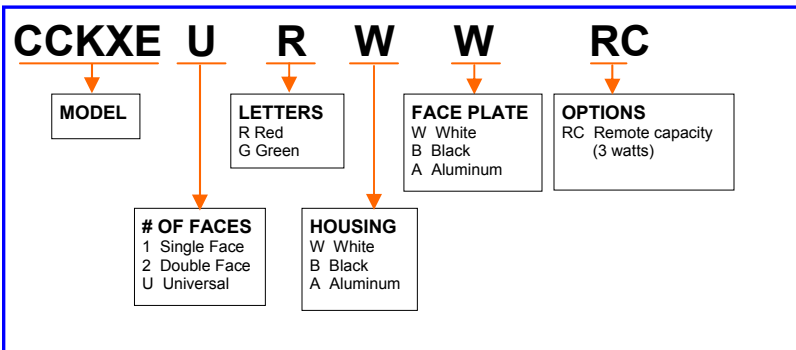

### SPECIFICATIONS

**Construction** Slim profile, premium-grade, extruded aluminum housing .

**Installation** Aluminum mount canopy included for top, or end mount. Universal knock out pattern on back plate for wall mount.

**Illumination** High intensity red or green LEDs for the Exit face. Ultra bright white LEDs for the heads - 3 watts per head

**Electronics** Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.


**Power Consumption** 4.6 watts @ 120 volts, or, 4.8 watts @ 277 volts.

**Battery** 8.4 volts sealed NiCad battery provides a minimum of 90 minutes of emergency operation

**Code Compliance** UL Listed to UL924 for damp locations (0°C to 50°C) Meets or exceeds the requirements of the National Electrical Code and NFPA101

**Warranty** One year warranty from date of shipment on entire unit. 5 year pro rata warranty on the batteries. See Warranty Statement for details.

### DIMENSIONS



### STANDARD FEATURES

- Premium grade die-cast combo
- Unique new design provides spec-grade EXIT sign with LED lamp heads in one low-profile housing.
- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Quick-snap face plate closure.
- Unique design allows double face conversion in the field.
- Attractive design
- Universal 120/277 volt 60 Hz input.
- Aluminum canopy included for top or end mount
- Long Life LED lamps provide bright and even illumination across the exit face
- Fully adjustable glare free lighting heads
- Ultra white LED lamp heads –3 watts per lamp
- Available in red or green letters
- Universal wall, end or ceiling mounting.
- Universal models supplied with 2 stencil faces and a blank plate to satisfy all applications
- Fully automatic solid state charger returns battery to full charge after return of AC supply.
- Solid state relay supervision
- low battery voltage disconnect,
- AC lockout and brownout protection.
- AC ready LED indicator.
- Test switch.