


Fixture Type:	
Model Number:	
Project:	

## ATC Series Combination Steel Exit Signs




### ORDERING GUIDE

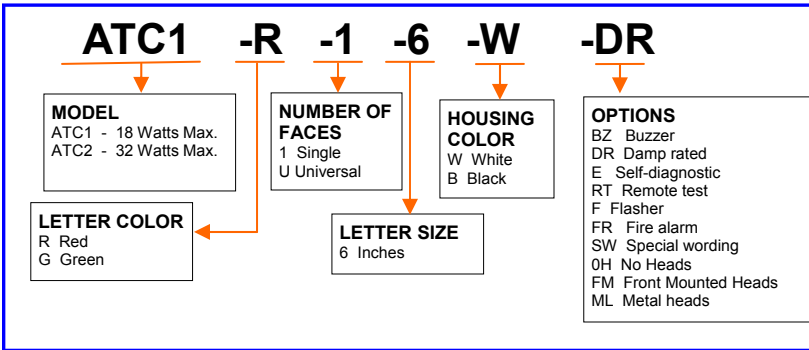


### SPECIFICATIONS

<b>Construction</b>	Heavy duty steel construction finished in a bright white paint.
<b>Installation</b>	Canopy is supplied with all models for wall, end, or ceiling mount.
<b>Illumination</b>	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
<b>Electronics</b>	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
<b>Power Consumption</b>	Red 3.5/4.2 watts @ 120/277 volts Green 7.9/8.4 watts @ 120/277 volts
<b>Battery</b>	Sealed lead calcium battery provides a minimum of 90 minutes of emergency operation
<b>Code Compliance</b>	ETL Listed to UL924. Meets or exceeds the requirements of the National Code and NFPA101
<b>Warranty</b>	One year warranty from date of shipment on entire unit. 7 year pro rata warranty on the batteries. See Warranty Statement for details.

### DIMENSIONS

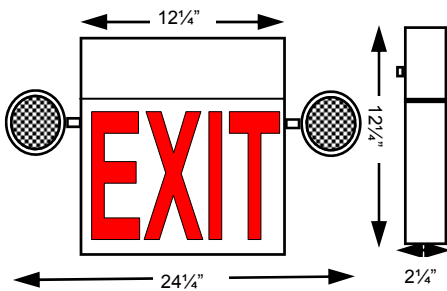

**RT - Remote test (Optional)**  
Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote required, not included.



### STANDARD FEATURES All Models

- Universal 120/277 volt 60 Hz field selectable input
- Heavy duty steel construction
- Easy to install
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters
- White housing (Black is optional)
- Snap-out, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available in single face or universal models.
- Sealed lead calcium maintenance free battery
- 90 minutes of emergency illumination
- Up to 32 watt capacity
- Standard with two side mounted heads with 7.2 watt lamps ( lamp code 21)
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Operating range 68°F to 86°F
- Self diagnostics circuitry is available (Optional)
- Remote test (Optional)
- MADE IN THE USA