


|               |  |
|---------------|--|
| Fixture Type: |  |
| Model Number: |  |
| Project:      |  |

## DX Series Commercial Grade Cast Aluminum Exit Signs

### ORDERING GUIDE

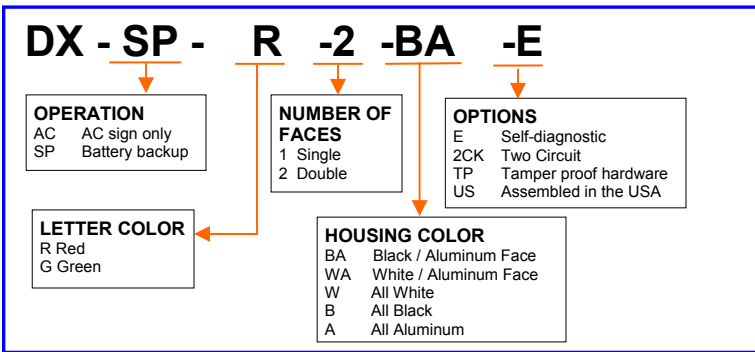

### STANDARD FEATURES

#### All Models

- Universal 120/277 volt 60 Hz field selectable input
- Precision molded die-cast aluminum housing
- Fine grain brushed aluminum face with clear lacquer finish
- Easy to install snap together construction
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters
- Optional all white or black housing
- Snap-in, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available in single face or double face models
- Unique design allows for double face conversion in the field

### SPECIFICATIONS

|                          |  |
|--------------------------|--|
| <b>Construction</b>      | Precision molded, die-cast aluminum housing  |
| <b>Installation</b>      | Canopy is supplied with all models for wall, end, or ceiling mount.  |
| <b>Illumination</b>      | All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.                              |
| <b>Electronics</b>       | Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.  |
| <b>Power Consumption</b> | Red 3.2 / 3.6 watts @ 120/277 volts<br>Green 3.8 / 4.4 watts @ 120/277 volts   |
| <b>Battery</b>           | Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation   |
| <b>Code Compliance</b>   | UL924 and Damp location listed. ( 0°C to 50°C)<br>Meets or exceeds NFPA and NEC guidelines   |
| <b>Warranty</b>          | One year warranty from date of shipment on entire unit. 5 year pro rata warranty on the batteries. See Warranty Statement for details. |

#### Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.

### DIMENSIONS

