


Fixture Type:	
Model Number:	
Project:	

# CAC / CACL Chicago Series Steel Emergency Lighting



#### **ORDERING GUIDE**

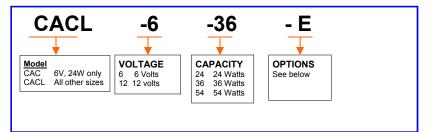

#### **OPTIONS**

V Voltmeter\* Ammeter\* Α RT Remote Test Ε Self Diagnostics\*\* TD Time Delay 0H No Heads 1H 1Head 3H 3 Heads

SM Side Mounted Heads CP Cord and Plug (120 VAC)

NI Nickel Cadmium Battery (up to 36 watts @ 6 volts, and up to 54 watts @ 12 volts)


#### Not available in 12 voit NiCad units

### **SELF-TEST / DIAGNOSTIC (Optional)**

- Microprocessor controlled state of the art self-diagnostic system
- Automatic 15 minute monthly, and, 90 minute yearly discharge tests
- Visual and Audible indicators for the following conditions:
  - Transfer failure
  - Charger malfunction
  - Defective battery
  - Burnt out lamp

#### RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote required, not included.



#### **DIMENSIONS**

Models	Length	Width	Height*	Wght
CAC624 & CACL636	91/4	21/2	123/8	14lbs
CACL1224	101/4	21/2	15	12lbs
CACL1236	131/8	21/2	15½	14lbs
CACL654 & 1254	131/8	21/2	15½	20lbs

<sup>\*</sup> Measured to the top of the lighting heads.

## STANDARD FEATURES

- Compact low profile design (less than 3" deep)
- Heavy duty steel construction with a bright white finish.
- Universal 120/277 volt 60 Hz input
- Fully automatic solid state charger returns battery to full charge according to UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout
- Brownout protection.
- High charge and AC ready LED indicators.
- Test switch
- Long life maintenance free valve regulated lead acid battery
- Minimum of 90 minutes of emergency illumination
- Supplied with two metal heads with 12 watt PAR36 halogen sealed beam amps
- Remote test is optional and requires an IRT hand held tester.
- MADE IN THE USA

#### **AGENCY APPROVALS**

ETL Listed to UL924.

Meets or exceeds the requirements of the National Electrical Code and NFPA 101.

### WARRANTY

One year warranty from date of shipment on entire unit. Battery will carry additional pro-rata warranty. See Warranty Statement for details.

2 Marlen Dr., Hamilton, NJ 08691 www.carpenterlighting.com

P/N 99-2027 - 2014

**Carpenter Emergency Lighting** 

Phone: 609-689-3090 Fax: 609-689-3091

<sup>\*</sup> Only one meter may be installed. \*\* Not available in 12 volt NiCad units