


Fixture Type:	
Model Number:	
Project:	

CBR-D-F Dimming Switch Bypass Module

Carpenter Emergency Lighting's CBR-D-F switch bypass control modules are designed to allow locally dimmed lighting fixtures to be used for emergency operation. The CBR-D-F bypass module must be used in conjunction with either a generator or an inverter system.

ORDERING INFORMATION

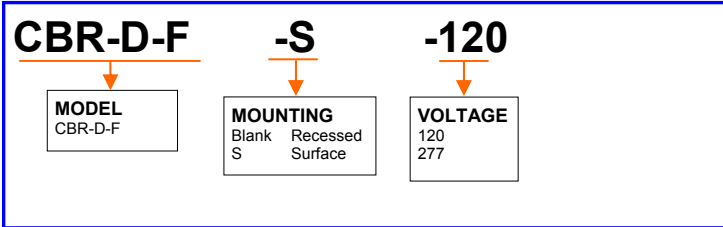

Application	CBR-D-F switch bypass modules are designed to allow locally dimmed lighting fixtures to be wired for emergency operation from either generator, inverter system, or secondary sources.
Operation	During normal operation, LEDs on the CBR-D-F module's faceplate indicate the presence of both utility (green), and emergency (red) power; and, the local switch will be capable of turning all circuit lighting fixtures on, off or dimmed as required. During a utility power failure, emergency lighting fixtures controlled by the CBR-D-F module will return to full brightness regardless of the position of the local switch.
Energy Conservation	By eliminating the need for night light circuits, the CBR-D-F bypass modules conserve energy by allowing all area ambient lighting to be turned off while still assuring the availability of emergency illumination in the event of a utility power failure.

PRODUCT FEATURES

- Adapts locally switched lighting fixtures for emergency operation
- The CBR-D-F control bypasses local dimming during power failures and returns fixtures to full brightness
- Compatible with 2, 3 wire or 10 volt dimming systems
- Saves energy by eliminating night light circuits
- Approved for surface, in-wall or in-ceiling applications
- 20 amp ballast load rating
- Fast, easy installation in standard electrical boxes
- 120 or 277 volts application
- Surge and short circuit protection
- Operating temperature 20°F to 150°F
- Visual power readiness indicators provide status at a glance
- Built-in manual emergency circuit test feature
- Momentary test switch

AGENCY APPROVALS

Meets NFPA Life Safety Code 101, NEC and OSHA UL94-5VA Flame rating
UL924 listed

DIMENSIONS

5 1/8"W x 5 1/8"H x 2 1/4"D

WARRANTY

5 Year replacement Warranty