


Fixture Type:	
Model Number:	
Project:	

## CCW Series Decorative Combination Unit



### ORDERING GUIDE

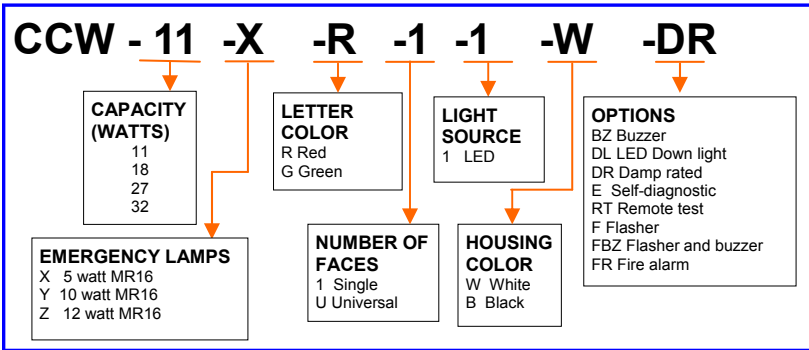


### SPECIFICATIONS

<b>Construction</b>	Housing is constructed of molded virgin UL94V0 thermoplastic
<b>Installation</b>	Canopy is supplied with all models for wall, end, or ceiling mount.
<b>Illumination</b>	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
<b>Electronics</b>	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
<b>Power Consumption</b>	8.74 watts maximum at high charge
<b>Battery</b>	Sealed Lead Calcium- Provides a minimum of 90 minutes of emergency operation
<b>Code Compliance</b>	ETL Listed to UL924. Meets or exceeds the requirements of the National Code and NFPA101
<b>Warranty</b>	One year warranty from date of shipment on entire unit. 7 year pro rata warranty on the batteries. See Warranty Statement for details.

#### RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away.



#### DIMENSIONS

12<sup>3</sup>/<sub>4</sub>" L x 13<sup>1</sup>/<sub>2</sub>" H x 5<sup>1</sup>/<sub>2</sub>" D (including heads)

### STANDARD FEATURES

- Architectural design
- Universal 120/277 volt 60 Hz input. (other voltages available)
- Molded of virgin UL 94V0 thermoplastic in a neutral white finish.
- Easy to install, most parts snap together.
- Long Life LED lamps provide bright and even illumination across the exit face
- Front mounted MR16 lamps provide superior emergency illumination
- Models available up to 32 watts total capacity
- Energy saving LED operation
- Available in red or green letters
- Snap-in, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available as single face or universal models
- Fully automatic solid state charger returns battery to full charge after return of AC supply.
- Solid state relay supervision
- low battery voltage disconnect,
- AC lockout and brownout protection.
- AC ready LED indicator.
- Test switch.
- Long life, valve regulated lead acid, maintenance free battery provides a minimum of 90 minutes of emergency illumination.
- Available with Remote Test
- **MADE IN THE USA**