


Fixture Type:	
Model Number:	
Project:	

## CIS3P SERIES FAST TRANSFER 3 PHASE INVERTER SYSTEM



### ORDERING GUIDE

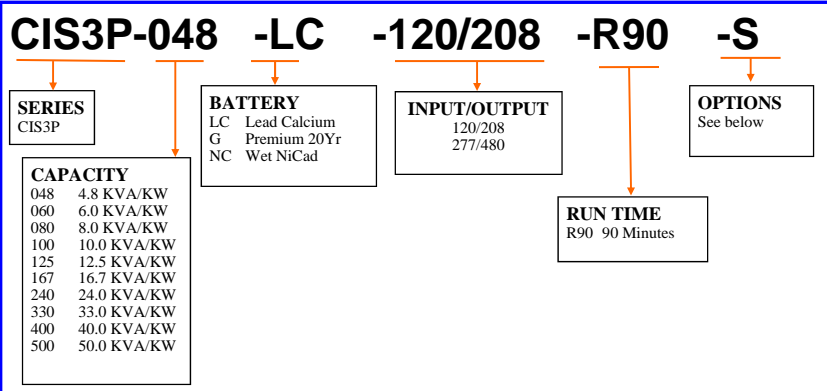

### PRODUCT FEATURES

- Pulse Width Modulated inverter design with IGBT technology
- "Off line" operation for increased reliability and efficiency
- < 2ms transfer time
- Self-testing/self-diagnostic operation
- 97% efficiency rating at full load
- Harmonic distortion <10%
- Load power factor range .5 lead to .5 lag
- 4.8 KVA to 50 KVA models
- Compatible with all lighting loads including HID, fluorescent, incandescent and LED
- Backup generator compatible
- Microprocessor controlled, 20 character display with touch pad controls and functions
- User programmable with password protection
- Input circuit breaker - standard
- Internal bypass switch - standard
- RS-232 communications port
- Small footprint
- 90 minute operation standard, alternate runtimes available
- Maintenance-free lead calcium battery standard
- Optional long life lead calcium and wet-cell nickel cadmium batteries
- 68°F to 86°F (20°C to 30°C) operating range
- Meets NFPA Life Safety Code 101, NEC and OSHA
- UL924 listed

### OPTIONS<sup>2</sup>

- CH** Charger upgrade
- IO** Inverter On Contacts
- S** Summary Alarm Contacts
- MOD** External Modem
- RMP** Remote Meter Panel
- RAP** Remote Alarm Panel
- Z** Seismic Bracing<sup>1</sup>
- BCM** Battery Cycle Monitor
- TD** 15-Minute Re-transfer Delay
- OCB** Output Circuit Breaker - (See page 4 for details)
- AR** Alternate Run Time (Specify Time in Minutes)
- IDB** Internal Dimmer Bypass
- SNMP** Simple Network Monitoring Protocol
- SMC** Status Monitoring Contacts
- FS** Factory Start-Up (Includes One Additional Year Of Warranty on the electronics portion only)
- EW** Extended Warranty (Includes FS)
- EMBP** External Maintenance Bypass Switch
- BCF** Battery Cabinet Fan
- BTM(S)** Battery Thermal Monitor with Shunt Trip

<sup>1</sup> System cabinetry may not be stacked on models specified with SEISMIC option - Brackets add 7 inches to the overall length  
<sup>2</sup> Some options may impact product UL listing. Consult factory

### Application

The CIS3P Series is designed to back up critical loads where transfer to emergency mode must be uninterrupted. The CIS3P Series with Pulse Width Modulated design and ultra fast, 2ms switching provides the “no break” performance ideally suited for HID type lighting and other voltage or frequency sensitive loads. Additionally, the CIS3P “offline” design delivers superior reliability and increased MTBF.

### Construction

**Cabinetry:** Freestanding heavy duty NEMA Type 1 steel cabinets are finished in neutral tan baked-on powder paint providing scratch and corrosion resistance.

**Cooling:** Electronics Cabinet - Convection in standby mode with forced air during emergency mode.

**Battery Cabinets -** Convection cooling. Auxiliary air conditioning units available for high temperature environments, consult factory.

**Access:** Front access via hinged, lockable doors on all electronics and battery cabinets.

### Installation

**Mounting:** Freestanding cabinets bolt together when more than one cabinet is required. An optional seismic kit is available for securing systems in areas requiring earthquake resistance, see “Options” section on front of sheet for ordering details.

### Code Information

UL924 Listed and meets NFPA 101 Life Safety Code, NFPA 70, NFPA 110, UBC, SBCCI, NEC and OSHA

### Warranty Information

#### System:

1-year full coverage against defects in materials and workmanship from date of shipment

#### Batteries:

**Standard Lead Calcium Battery:** 1 year full warranty plus 9 years of pro-rata coverage

**Optional Long Life Lead Calcium Battery:** 1 year full warranty plus 19 years of pro-rata coverage

**Optional Wet Nickel Cadmium Battery:** 1 years full warranty plus 14 years of pro-rata coverage.

### Physical specifications

Model Number	System Efficiency @ Full Load	Audible Noise DBA @ 1M	Heat Loss (BTU)	Number of Batteries	Battery Voltage	Max DC Current	AC Input Current		Total System Weight	
							120/208 VAC	277/480 VAC	Lbs.	Kg.
							Max	Max		
CIS3P048	97	45	326	12	144	40	17	7	1,520	690
CIS3P060	97	45	408	15	180	40	21	9	1,925	874
CIS3P080	97	45	544	20	240	39	28	12	2,300	1,044
CIS3P100	97	45	680	24	144	82	35	15	2,680	1,217
CIS3P125	97	45	850	30	180	82	43	19	3,130	1,421
CIS3P167	97	45	1,136	40	240	80	58	25	4,060	1,843
CIS3P240	97	45	1,632	60	240	117	84	36	6,165	2,798
CIS3P330	97	45	2,244	40	240	160	115	50	7,775	3,529
CIS3P400	97	45	2,720	100	240	194	139	60	9,855	4,474
CIS3P500	97	45	3,400	60	240	243	174	75	11,475	5,209

Specifications listed are for 90 minute rated systems utilizing standard type “LC” batteries. Consult factory for specifications on models with alternate batteries and runtimes

### Electrical Specifications

#### Input

Input Voltages: (60Hz) 120/208 or 277/480, 3 Phase 4 wire plus ground

Voltage Range: +10% to - 15%

Input Frequencies: 60Hz ± 3%

Synchronizing Slew Rate: 1 Hz per second nominal

Harmonic Distortion: <10%

Power Factor: 0.5 lead/lag

Inrush Current: 1.25 times nominal input current. 10 times one line cycle for incandescent loads

Surge Protection: Meets ANSI C62.41 (IEEE 587) and ANSI C62.42.45 (Cat A & B)

Input Protection: Circuit breaker

#### Output

Output Voltages: (60Hz) 120/208 or 277/480, 3 Phase 4 wire plus ground (Standard)

Static Voltage: Load current change ± 2%

Dynamic Voltage: ± 2% for ± 25% load step change, ± 3% for ± 50% load change.

Dynamic Recovery Time to within 1% of Nominal 3 cycles.

Output Frequencies: Synchronized to utility. 60 Hz ± .05Hz during emergency operation

Output Distortion: <3% THD (linear load)

Transfer Time: 2 ms

Load Power Factor Range: 0.5 Lead to 0.5 Lag

Overload Protection: 115% for 5 minutes

Crest Factor: ≤ 2.8

Output Protection: Standard fuse or optional output circuit breakers

### Batteries and Charger

Charger Type: Fully automatic, microprocessor controlled, temperature compensating

Recharge Duty Cycle: 24 hours

Charger Protection: Fused output and automatic low voltage battery disconnect

Standard Battery: Sealed Lead Calcium (10 year life) - Type LC

Optional Batteries: Sealed Lead Calcium (20 year life) - Type G

Wet-cell Nickel Cadmium (25 year life) - Type NC

Battery Voltage: 144 to 240VDC (depending on system rating)

Runtime: 90 minutes standard - based on battery performance at 77°F (25°C). Other runtimes available, consult factory.

### Environmental

Altitude: < 10,000 feet (3,000m) above sea level without de-rating

Operating Temp Range: Optimum performance between 68°F and 86°F (20°C and 30°C)

Relative Humidity: 95% non-condensing

### Control Panel

Type: 2x20-character display with touch pad control, five LED function indicators and alarm annunciator with ring back feature.

### Communications

Type: RS-232 port (DB9) standard on all models.

### CONTROL PANEL

The CIS3P system's user interface control panel provides access to the following features and functions:

#### Meter Functions

- AC Voltage Input
- AC Voltage Output
- AC Current Output
- Battery Voltage
- Battery Current
- VA Output
- Inverter Watts
- Ambient Temperature
- System Days (cumulative)
- Inverter Minutes (cumulative)

#### Program Functions

- Set Date
- Set Time
- Set Monthly Test Date and Time
- Set Annual Test Date and Time
- Set Load Fault Reduction Setting
- Set Low Battery Alarm
- Set Near Low Battery Alarm
- Set Low AC Voltage Alarm
- Set High AC Alarm
- Set Ambient Temperature Alarm

#### Alarms

- High Battery Charger Voltage
- Low Battery Charger Voltage
- High AC Input Voltage
- Low AC Input Voltage
- Near Low Battery Voltage
- Low Battery Voltage
- Load Reduction Fault
- High Ambient Temperature
- Inverter Fault
- Output Fault
- Output Overload



#### Control Functions

**Test and Event Logs:** (75 logs stored) Logs record the following data: Date, Time, Duration, Output Voltage, Output Current, Ambient Temperature and Alarms Present.

**Alarm Logs:** (50 logs stored) Logs record the following data: Date, Time and Alarm type

**5 LED Indicators and Alarms With Ring back Feature**

**Buzzer:** On/Off (toggle)


#### System Testing

Systems provide both a manual and two automatic test functions. Manual tests of system operational readiness may be performed at any time by pressing the control panel test switch. Automatic self-diagnostic tests consist of a 5-minute monthly and 90-minute annual function. The date and time of automatic monthly and annual test routines are user programmable.


### CABINET CONFIGURATIONS AND DIMENSIONS

Battery Type	System Model Number									
	CIS3P048	CIS3P060	CIS3P080	CIS3P100	CIS3P125	CIS3P167	CIS3P240	CIS3P330	CIS3P400	CIS3P500
LC - Standard 10 Year Life	A	A	A	B	B	B	C	D	D	D
G - Premium 20 Year Life	A	A	A	B	B	B	C	D	D	D
NC - Wet Nicad 25 Year Life	CONSULT FACTORY									


#### Configuration A

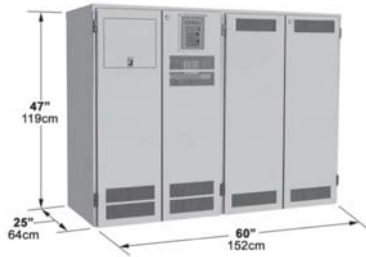


#### Configuration B

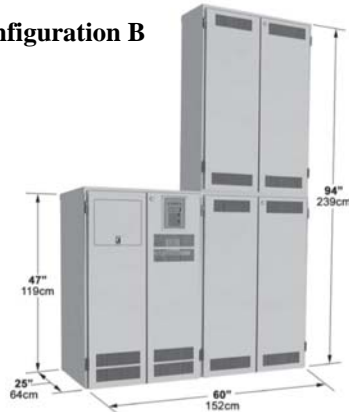

#### Configuration C

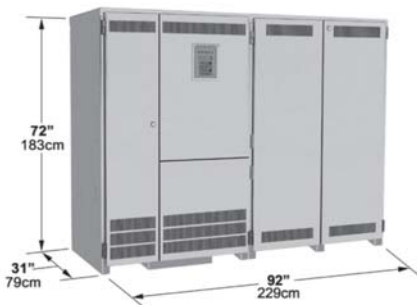

#### Configuration D

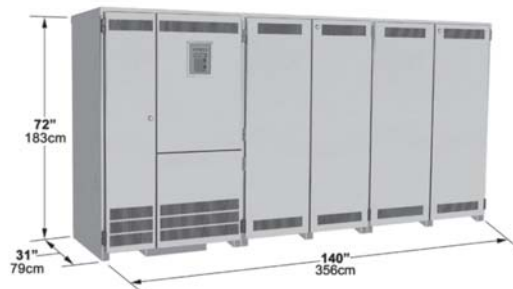

### OUTPUT CIRCUIT BREAKERS GUIDE

	B	A	20	10	T
<b>Function</b>	B Norm On N Norm Off	A 120 volts B 208 volts (2P) C 240 volts (2P) D 277 volts E 120/208 (3P) F 277/480 (3P) G 480 volts (2P)	<b>Current Rating</b> 10-60 Amps	<b>Quantity<sup>2</sup></b> 01 - 12 (8 max w/alarm)	<b>Optional</b> Trip Alarm
			<sup>2</sup> Contact Factory for additional requirements		

#### Normally-Off Output (N)

The system's output circuit is dedicated to emergency equipment only. Normally off loads operate only during power failures when the system is operating in battery mode. This option leaves connected loads off during normal utility power conditions.

#### Battery Charger Upgrade (CH)

The battery charger upgrade option decreases the time required to return a fully discharged battery to the fully charged state. The normal 24 hour recharge cycle is reduced to 12 hours.

#### Alternate Run Time (AR)

The system's normal 90-minute discharge cycle can be specified to meet decreased or increased run times in special product applications. Specify required discharge time in minutes. Example: AR (30)

#### External Maintenance Bypass Switch (EMBP)

The external maintenance bypass switch is supplied in a 20"H x 16"W x 9"D NEMA 1 enclosure and is a "make before break" disconnect device used to completely isolate the inverter system from the connected load. This option allows the system to be safely powered down for maintenance or service without interruption of utility power to the connected load. The option may not be specified on systems with more than one single pole output circuit breaker which must be sized for the total system output current.

#### Inverter On Form C Contacts (IO)

Provides summary form C relay contacts that monitor inverter operation. Supplied with both normally-open and normally-closed contacts that change state upon inverter activation. Contact ratings are 5 amps maximum at 250VAC/30VDC.

#### Summary Form C Contacts (S)

Summary form C low power contacts allow connection points for alarm relay outputs for remote monitoring purposes. Rated at 5 amps (250VAC/30VDC), the contacts will change state with the activation of the following alarms: High/Low Battery Charger Voltage, High/Low AC Input Voltage, Near Low Battery Voltage, Low Battery Voltage, Load Reduction Fault, High Ambient Temperature, Inverter Fault, Output Fault, Output Overload as well as with optional circuit breaker trip alarms if supplied.

#### Internal Maintenance Bypass Switch (M) - Standard

The Internal Maintenance Bypass Switch is a make-before-break manual switch that allows the system to be bypassed during routine maintenance allowing egress lighting to remain on for safety.

#### Time Delay (TD)

A 15 minute delay during retransfer allows normally off emergency lighting to remain on while power stabilizes and ambient lighting, such as HID, has time to reach full brightness.

#### Internal Dimmer Bypass (IDB)

Provides a means to bypass local dimming circuits and return emergency lighting fixtures to full brightness.

#### Battery Cycle Monitor (BCM)

In depth battery monitoring circuitry to evaluate battery condition and health. See brochure for full details.

#### Battery Thermal Monitor (BTM(S))

Monitors each battery's outer case temperature and disables the charging circuit if overheating is detected, preventing thermal runaway

#### Battery Cabinet Fan (BCF)

Provides a fan to keep batteries cool and ventilated

#### Seismic Bracing Kit (Z)

The seismic bracing kit option is designed to prevent system movement during seismic events. Heavy duty brackets are provided to secure system cabinetry to floor surfaces. Meets Zone 4 requirements.

*NOTE: For reasons of safety, system cabinetry may not be stacked on models specified with SEISMIC option.*

#### External Modem (MOD)

The external modem is designed to boost the signal level of the RS-232 communications interface to remote monitoring locations more than 100 feet away from the system location.

#### Simple Network Monitoring Protocol (SNMP)

The -SNMP option consists of an externally mounted box that provides a communications interface between the inverter system's RS-232 port and an Ethernet 10BASE-T local area network. The option allows LAN monitoring of system status and all operating parameters. LAN servers with VPN remote access further allow system status monitoring via the World Wide Web.

#### Remote Meter Panel (RMP)

Allows remote monitoring of system status and all operating parameters from locations up to 300 feet away from the inverter system. Additionally, the panel provides a complete touch pad interface allowing the user to monitor, control and program the inverter system remotely.

#### Remote Summary Alarm Panel (RAP)

Remote alarm annunciator panel provides a visual and audible indication of system status and alarm conditions. The panel option which consists of five LED indicators and built in audible alarm may be located up to 1,000 feet away from the inverter system. Option requires user supplied two-conductor, 20AWG interconnecting cable.

#### Status Monitoring Contacts (SMC)

Form "C" dry contacts capable of monitoring system and option statuses. Conditions monitored include Inverter On, Inverter off, AC present, High Temperature, Summary Alarm, System Bypass and Output Circuit Breaker Tripped.

#### Extended Warranty (EW)\*

Extends standard one year factory warranty up to an additional four years. Includes Factory Start-Up Service.

#### Factory Start-Up (FS)\*

Initial on-site power up and test of inverter system and accessories performance to factory specifications by the manufacturer's local authorized service representative. Includes one additional year of warranty.

\*Warranty extensions apply to system electronics only. System batteries are covered by a separate pro-rata warranty which remains unchanged.