


Fixture Type:	
Model Number:	
Project:	

CCXTE Series Contractor Grade Combination Unit


ORDERING GUIDE

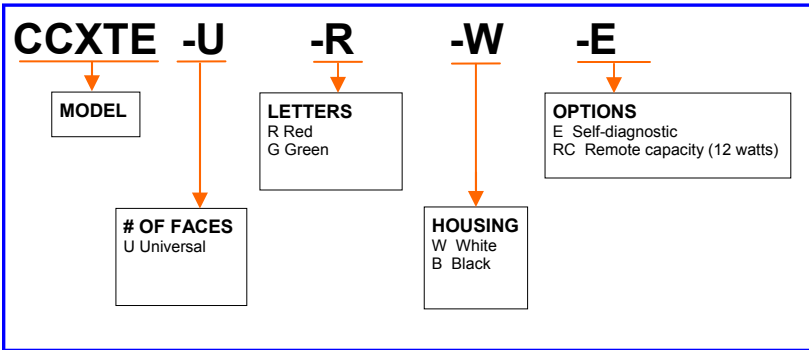

SPECIFICATIONS

Construction	Housing is constructed of injection molded UL94V0 thermoplastic
Installation	Canopy is supplied with all models for wall, end, or ceiling mount.
Illumination	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
Electronics	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
Power Consumption	2 watts red, 1.96 watts green @ 120 or 277 volts.
Battery	Sealed Lead Calcium- Provides a minimum of 90 minutes of emergency operation
Code Compliance	UL Listed to UL924. cUL listed. Suitable for damp locations. Meets or exceeds the requirements of the National Code and NFPA101
Warranty	One year warranty from date of shipment on entire unit. 7 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

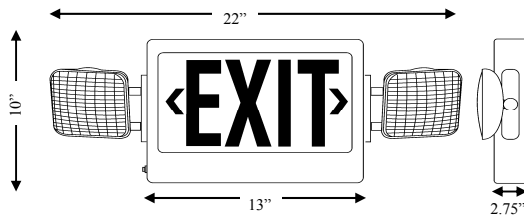

STANDARD FEATURES

- Attractive design
- Universal 120/277 volt 60 Hz input. (other voltages available)
- Injection molded, high impact, UV stabilized, UL 94V0 thermoplastic housing
- Easy to install, most parts snap together.
- Long Life LED lamps provide bright and even illumination across the exit face
- Fully adjustable glare free lighting heads with 5.4 watt wedge base lamp
- Energy saving LED operation
- Available in red or green letters
- Snap-in, chevron type, directional arrows.
- Universal wall or ceiling mounting.
- Supplied with 2 stencil faces and a blank plate to satisfy all applications
- Fully automatic solid state charger returns battery to full charge after return of AC supply.
- Solid state relay supervision
- low battery voltage disconnect,
- AC lockout and brownout protection.
- AC ready LED indicator.
- Test switch.
- Long life, valve regulated lead acid, maintenance free battery provides a minimum of 90 minutes of emergency illumination.