


Fixture Type:	
Model Number:	
Project:	

## CEDG Series Recessed Edge Lit Exit Signs




### ORDERING GUIDE

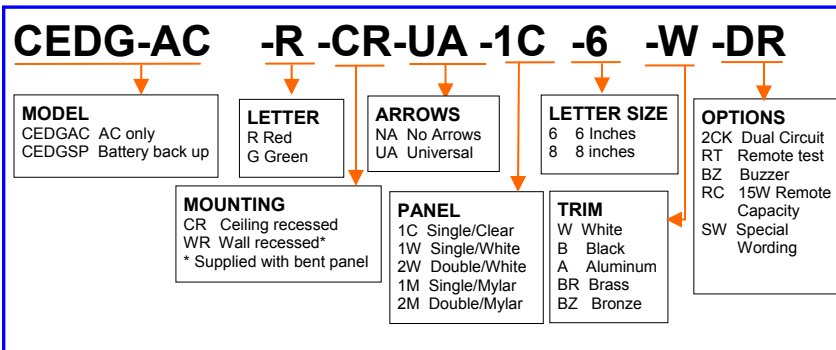

### SPECIFICATIONS

<b>Construction</b>	Housing is constructed of heavy duty steel with a bright white finish. Other colors available.
<b>Installation</b>	Recessed housing is provided with molded flanges for ease of installation. Can be installed in "hard ceilings".
<b>Illumination</b>	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
<b>Electronics</b>	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
<b>Power Consumption</b>	AC models - 3.5 watts @ 120/277 volts Emergency models - 4.2 watts @ 120/277 volts
<b>Battery</b>	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
<b>Code Compliance</b>	ETL Listed to UL924. Meets or exceeds the requirements of the National Code and NFPA101
<b>Warranty</b>	One year warranty from date of shipment on entire unit. 7 year pro rata warranty on the batteries. See Warranty Statement for details.

### DIMENSIONS

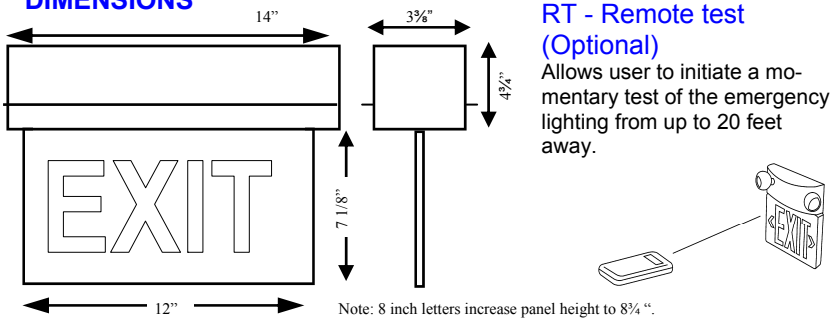

### STANDARD FEATURES All Models

- Architectural decorative look
- Universal 120/277 volt 60 Hz field selectable input
- Heavy duty steel construction with a white powder coat finish
- Molded flanges for ease of installation
- Can be used in "hard" ceilings
- Completely accessible from below reduces installation time
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters
- Stick on, chevron type, directional arrows.
- Available in single or double face models

### Emergency Models

- Premium nickel cadmium maintenance free battery
- Remote capacity models provided with a sealed lead calcium battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Operating range 68°F to 86°F
- Remote test (Optional)
- MADE IN THE USA

Carpenter Emergency Lighting  
Phone: 609-689-3090 Fax: 609-689-3091

2 Marlen Dr., Hamilton, NJ 08691  
www.carpenterlighting.com