


Fixture Type:	
Model Number:	
Project:	

CEW Series Thermoplastic Exit Signs



ORDERING GUIDE

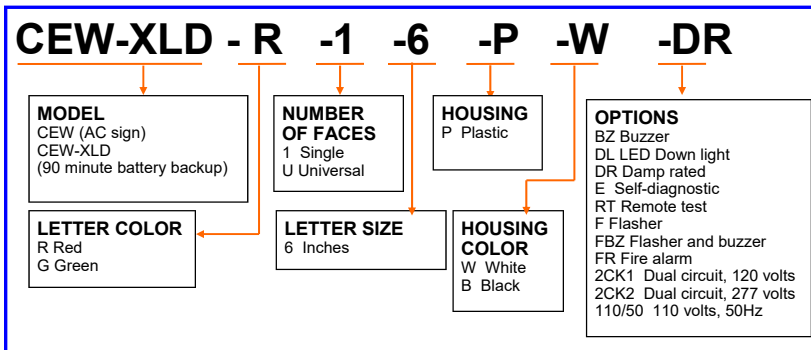

SPECIFICATIONS


Construction	Housing is constructed of molded virgin UL94V0 thermoplastic
Installation	Canopy is supplied with all models for wall, end, or ceiling mount.
Illumination	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
Electronics	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
Power Consumption	Red 3.5/4.2 watts @ 120/277 volts Green 7.9/8.4 watts @ 120/277 volts
Battery	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
Code Compliance	ETL Listed to UL924. Meets or exceeds the requirements of the National Code and NFPA101
Warranty	One year warranty from date of shipment on entire unit. 7 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS



RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote required, not included.



Canopy Dimensions:

6"L x 4 1/2"W x 3/4"H

STANDARD FEATURES

All Models

- Universal 120/277 volt 60 Hz field selectable input
- Molded of virgin UL 94V0 thermoplastic in a neutral white finish.
- Easy to install snap together construction
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters
- White housing (Black is optional)
- Snap-in, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available in single face or universal models

Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Operating range 68°F to 86°F
- Self diagnostics circuitry is available (Optional)
- Remote test (Optional)
- MADE IN THE USA