


Fixture Type:	
Model Number:	
Project:	

CWL Series Wet Location Combo With LED Heads

ORDERING GUIDE

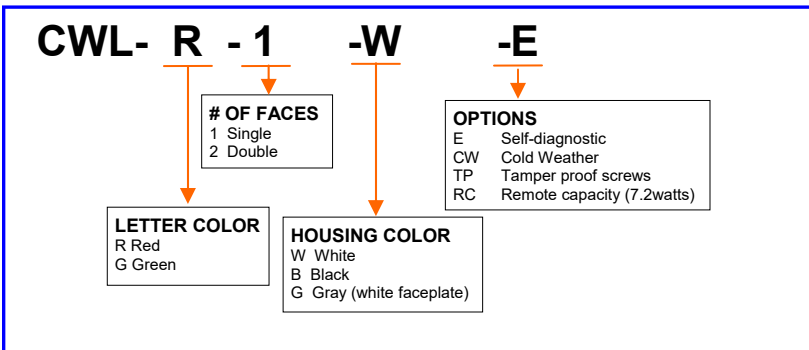

STANDARD FEATURES All Models

- Universal 120/277 volt 60 Hz field selectable input
- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.
- Long Life ultra white LED lamp heads
- 3.6 Watts per head
- Red or Green Exit letters
- 6 volts long life nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- AC lockout circuit reduces installation time
- Brownout protection.
- Bi-color LED indicator; Green- normal, Red-check battery.
- Momentary test switch.
- Cold weather optional heater for extreme cold locations, -20° to 50° C
- Self diagnostics circuitry is available (Optional)
- Custom wording available

SPECIFICATIONS

Construction	Housing is constructed of injection molded, engineering grade, 5VA flame retardant thermoplastic
Installation	Die cast canopy is supplied with all models for end, or ceiling mount.
Illumination	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
Electronics	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
Power Consumption	Red 4.9 watts @ 120/277 volts Green 4.9 watts @ 120/277 volts
Battery	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
Code Compliance	UL924 Listed for cold /wet locations (-20°C to 50°C) Meets NFPA and NEC guidelines
Warranty	Five year warranty from date of shipment on electronics; 5 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

