


Fixture Type:	
Model Number:	
Project:	

DC Series High Capacity Industrial Emergency Lighting



ORDERING GUIDE

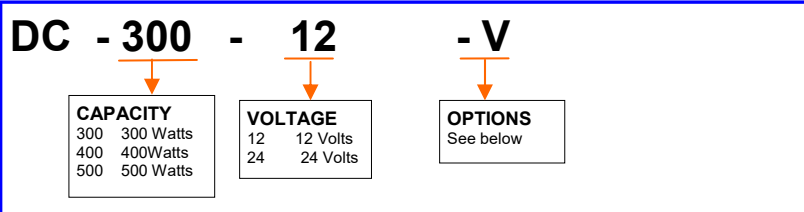


OPTIONS

V	Voltmeter
A	Ammeter
RT	Remote Test
TD	Time Delay
1H	1 Head*
2H	2 Heads*
3H	3 Heads*
ML	Metal Heads
CP	Cord and Plug (120 VAC)
B	Black housing

* Specify lamp code from our lamp chart for desired voltage and wattage

RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote (IRT) required, not included.



DIMENSIONS

Models	Length (in)	Height (in)	Width (in)
All Models	18¾	15	8

STANDARD FEATURES

- Industrial duty, high capacity units - up to 500 watts
- Available in 12 and 24 volt models for longer wire runs
- Universal 120/277 volt 60 Hz input - other voltages available upon request
- Fully automatic solid state charger returns battery to full charge according to UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout
- Brownout protection.
- High charge and AC ready LED indicators.
- Fused output with failure indicator
- DC overload and short circuit protection
- Test switch
- Long life maintenance free valve regulated lead acid battery
- Minimum of 90 minutes of emergency illumination.
- Heavy duty steel construction with a bright white finish. (Other colors available)
- Keyhole slots for wall mounting
- Front cover slides off for easy access and installation
- Supplied standard without heads
- **MADE IN THE USA**

AGENCY APPROVALS

ETL Listed to UL924.

Meets or exceeds the requirements of the National Electrical Code and NFPA 101.

WARRANTY

One year warranty from date of shipment on entire unit. Battery will carry additional pro-rata warranty. See Warranty Statement for details.

Carpenter Emergency Lighting
Phone: 609-689-3090 Fax: 609-689-3091

2 Marlen Dr., Hamilton, NJ 08691
www.carpenterlighting.com