


Fixture Type:	
Model Number:	
Project:	

DXT Series Commercial Grade Thin Cast Aluminum Exit Signs


ORDERING GUIDE

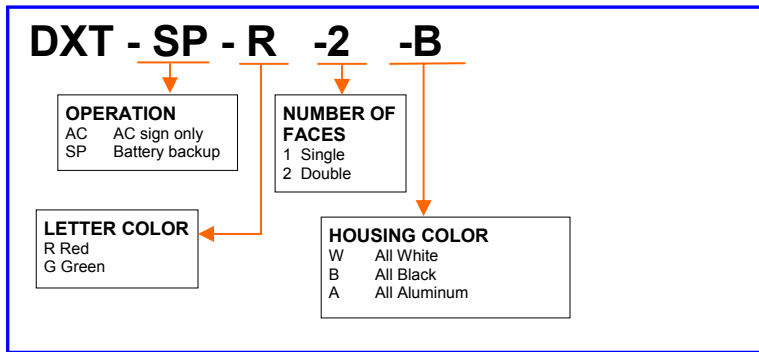

SPECIFICATIONS

Construction	Premium-grade, low profile, aluminum housing
Installation	Aluminum canopy is supplied with all models for wall, end, or ceiling mount.
Illumination	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
Electronics	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
Power Consumption	Red 3.2 / 3.6 watts @ 120/277 volts Green 3.8 / 4.4 watts @ 120/277 volts
Battery	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
Code Compliance	UL924 and Damp location listed. (0°C to 50°C) Meets or exceeds NFPA and NEC guidelines
Warranty	One year warranty from date of shipment on entire unit. 5 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

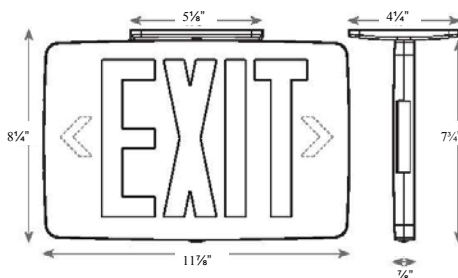

STANDARD FEATURES

All Models

- Universal 120/277 volt 60 Hz field selectable input
- Specification-grade, low profile thin aluminum die-cast design.
- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Easy to install snap together construction
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters
- Knock out, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available in single face or double face models

Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Damp location listed, 0° to 50° C