

Fixture Type:	
Model Number:	
Project:	

GTB Series - Recessed Grid Ceiling Emergency Lighting



ORDERING GUIDE

GTB - 2 - 6 -18 - E																			
↓																			
<table border="1"> <tr> <th>Housing Color</th> </tr> <tr> <td>2 White</td> </tr> <tr> <td>3 Black</td> </tr> <tr> <td>4 Grey</td> </tr> </table>	Housing Color	2 White	3 Black	4 Grey	<table border="1"> <tr> <th>VOLTAGE</th> </tr> <tr> <td>6 6 Volts</td> </tr> <tr> <td>12 12 volts</td> </tr> </table>	VOLTAGE	6 6 Volts	12 12 volts	<table border="1"> <tr> <th>CAPACITY</th> </tr> <tr> <td>18 18 Watts</td> </tr> <tr> <td>24 24 Watts</td> </tr> <tr> <td>36 36 Watts</td> </tr> <tr> <td>54 54 Watts</td> </tr> <tr> <td>75 75 Watts</td> </tr> <tr> <td>100 100 Watts¹</td> </tr> </table>	CAPACITY	18 18 Watts	24 24 Watts	36 36 Watts	54 54 Watts	75 75 Watts	100 100 Watts ¹	<table border="1"> <tr> <th>OPTIONS</th> </tr> <tr> <td>See below</td> </tr> </table>	OPTIONS	See below
Housing Color																			
2 White																			
3 Black																			
4 Grey																			
VOLTAGE																			
6 6 Volts																			
12 12 volts																			
CAPACITY																			
18 18 Watts																			
24 24 Watts																			
36 36 Watts																			
54 54 Watts																			
75 75 Watts																			
100 100 Watts ¹																			
OPTIONS																			
See below																			

¹ 12 volt unit only



OPTIONS

V	Voltmeter*
A	Ammeter*
RT	Remote Test
E	Self Diagnostics**
TD	Time Delay
0H	No Heads
1H	1Head
3H	3 Heads
NI	Nickel Cadmium Battery (maximum of 54W @ 6V and 100W @ 12 V)


* Only one meter may be installed.
 ** Available up to 54 watts at 6 volts and up to 100 watts at 12 volts. Not available in 12 volt NiCad units.

SELF-TEST / DIAGNOSTIC (Optional)


- Microprocessor controlled state of the art self-diagnostic system
- Automatic 15 minute monthly and 90 minute yearly discharge tests
- Visual and Audible indicators for the following conditions:
 - Transfer failure
 - Charger malfunction
 - Defective battery
 - Burnt out lamp

RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote (IRT) not included.



DIMENSIONS

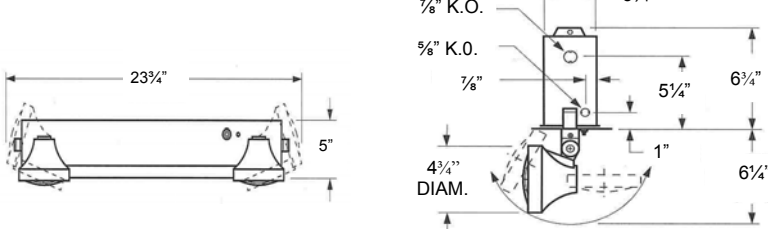

STANDARD FEATURES

- Easy "lay in" installation in grid type ceilings
- Bottom access for ease of maintenance
- Universal 120/277 volt 60 Hz input - other voltages available upon request
- Fully automatic solid state charger returns battery to full charge according to UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout
- Brownout protection.
- High charge and AC ready LED indicators.
- Test switch
- Long life maintenance free valve regulated lead acid battery
- Minimum of 90 minutes of emergency illumination.
- Heavy duty steel construction with a bright white finish. (Other colors available)
- Supplied with two PAR36 type heads with 7.2 watt wedge base lamps.
- Remote test is available and requires an Infra Red hand held tester.
- **MADE IN THE USA**

AGENCY APPROVALS

ETL Listed to UL924.
 Meets or exceeds the requirements of the National Electrical Code and NFPA 101.

WARRANTY

One year warranty from date of shipment on entire unit. Battery will carry additional pro-rata warranty. See Warranty Statement for details.