

Fixture Type:	
Model Number:	
Project:	

GTL Series Recessed Emergency Lighting



ORDERING GUIDE

GTL - 2 - 6 -18 - E																				
<table border="0"> <tr> <td style="text-align: center;">↓</td> <td style="text-align: center;">↓</td> <td style="text-align: center;">↓</td> <td style="text-align: center;">↓</td> </tr> <tr> <td>Housing Color</td> <td>VOLTAGE</td> <td>CAPACITY</td> <td>OPTIONS</td> </tr> <tr> <td>2 White</td> <td>6 6 Volts</td> <td>18 18 Watts</td> <td>See below</td> </tr> <tr> <td>3 Black</td> <td>12 12 volts</td> <td>24 24 Watts</td> <td></td> </tr> <tr> <td>4 Grey</td> <td></td> <td>36 36 Watts</td> <td></td> </tr> </table>	↓	↓	↓	↓	Housing Color	VOLTAGE	CAPACITY	OPTIONS	2 White	6 6 Volts	18 18 Watts	See below	3 Black	12 12 volts	24 24 Watts		4 Grey		36 36 Watts	
↓	↓	↓	↓																	
Housing Color	VOLTAGE	CAPACITY	OPTIONS																	
2 White	6 6 Volts	18 18 Watts	See below																	
3 Black	12 12 volts	24 24 Watts																		
4 Grey		36 36 Watts																		



OPTIONS

V	Voltmeter*
A	Ammeter*
RT	Remote Test
E	Self Diagnostics**
TD	Time Delay
0H	No Heads
1H	1Head
NI	Nickel Cadmium Battery
LED	1 Watt LED heads (See RFLED-Outdoor for details)


* Only one meter may be installed.
** Not available in 12 volt NiCad units

SELF-TEST / DIAGNOSTIC (Optional)



- Microprocessor controlled state of the art self-diagnostic system
- Automatic 15 minute monthly and 90 minute yearly discharge tests
- Visual and Audible indicators for the following conditions:
 - Transfer failure
 - Charger malfunction
 - Defective battery
 - Burnt out lamp

RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote (IRT) not included.



DIMENSIONS

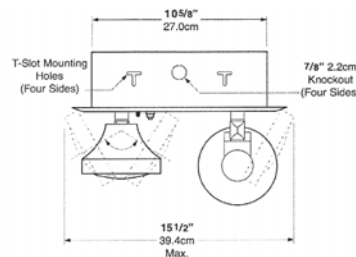

STANDARD FEATURES

- Recessed housing design allows for both ceiling and wall applications
- Front access for ease of maintenance
- Universal 120/277 volt 60 Hz input - other voltages available upon request
- Fully automatic solid state charger returns battery to full charge according to UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout
- Brownout protection.
- High charge and AC ready LED indicators.
- Test switch
- Long life maintenance free valve regulated lead acid battery
- Minimum of 90 minutes of emergency illumination.
- Heavy duty steel construction with a bright white finish. (Other colors available)
- Supplied with two PAR36 type heads with 7.2 watt wedge base lamps.
- Remote test is available and requires an Infra Red hand held tester.
- **MADE IN THE USA**

AGENCY APPROVALS

ETL Listed to UL924.
Meets or exceeds the requirements of the National Electrical Code and NFPA 101.

WARRANTY

One year warranty from date of shipment on entire unit. Battery will carry additional pro-rata warranty. See Warranty Statement for details.