


Fixture Type:	
Model Number:	
Project:	

MCX Series Commercial Grade Thermoplastic LED Combo Units


ORDERING GUIDE

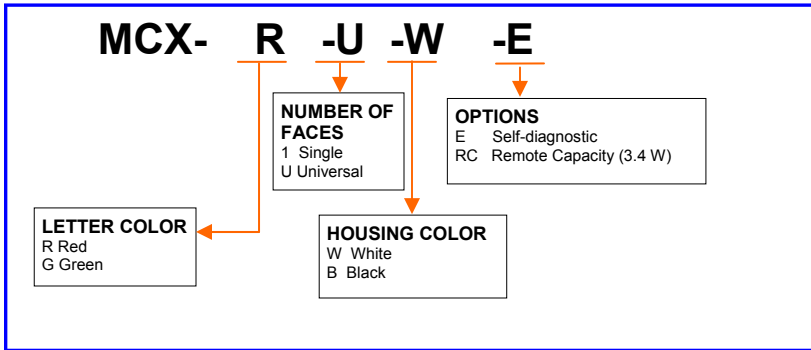

SPECIFICATIONS

Construction	Housing is constructed of injection molded, high impact, UV stabilized, UL94V0 thermoplastic
Installation	Canopy is supplied with all models for wall, end, or ceiling mount.
Illumination	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
Electronics	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
Power Consumption	Red 5.0 watts maximum @ 120/277 volts Green 5.0 watts maximum @ 120/277 volts
Battery	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
Code Compliance	UL924 and Damp location listed. (20°C to 30°C) Meets NFPA and NEC guidelines
Warranty	One year warranty from date of shipment on entire unit. 5 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

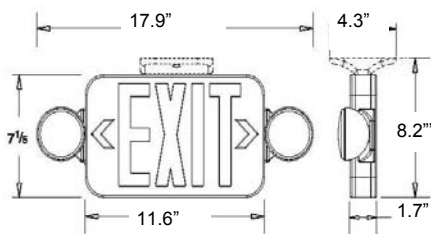

STANDARD FEATURES

All Models

- Universal 120/277 volt 60 Hz field selectable input
- Injection-molded, high impact, UV-stabilized, UL 94 V-0 Thermoplastic
- Easy to install snap together construction
- Long Life LED lamps provide bright and even illumination.
- Fully adjustable glare free LED heads
- Low power consumption
- Red or Green Exit letters
- White housing, black is optional
- Snap-in, chevron type, directional arrows.
- Universal back or ceiling mounting
- Available in single face or universal models
- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Self diagnostics circuitry is available (Optional)