


Fixture Type:	
Model Number:	
Project:	

MU Series LED Economy Emergency Lighting



ORDERING GUIDE

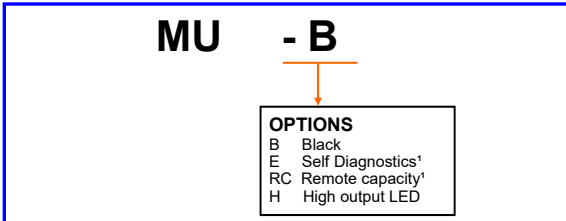

¹ Options may not be combined


ILLUMINATION

- Long lasting, efficient LED lamps
- Contemporary designed round heads
- Meet the requirements of the Life Safety Code
- Fully adjustable glare free lamp heads

SELF-TEST / DIAGNOSTIC (Optional)

Continuously monitors the critical functions of the equipment, including: battery disconnect, battery failure, charger failure, transformer failure and lamp failure. Self-Testing routine performs a one minute test every 30 days, a 30 minute test on the 6th month, and a 90 minute test annually.

DIMENSIONS

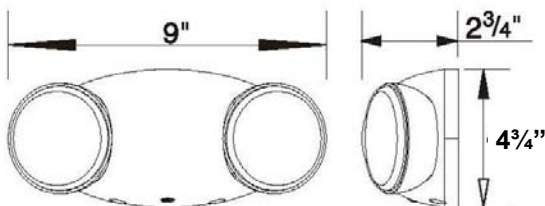

STANDARD FEATURES

- Injection-molded, engineering-grade, UL94-V-O flame retardant, high-impact resistant, thermo-plastic in white or black finish.
- Universal 120/277 volt 60 Hz input
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads
- Low battery voltage disconnect
- AC lockout
- Brownout protection
- Charge / Ready LED indicator
- Test switch
- Sealed nickel cadmium battery
- Minimum 90 minutes of emergency illumination.
- Universal mounting plate with quick-connect feature
- Top knockout for conduit applications
- Suitable for wall or ceiling mount.

AGENCY APPROVALS

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
UL listed for damp locations. (0°C – 50°C)

WARRANTY

Five year warranty on all electronics and housing. Battery is pro-rated for five years.