


Fixture Type:	
Model Number:	
Project:	

NX Series Wet Location Emergency Lighting



ORDERING GUIDE

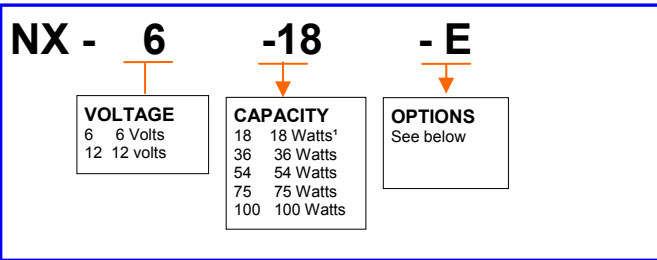

* 6 Volt units only
 6 Volt systems are supplied with two 8 watt PAR36 sealed beam lamps - Lamp Code #02
 12 volt systems are supplied with two 12 watt PAR36 sealed beam lamps - Lamp Code #10
 Other lamps may be specified up to the maximum capacity of the unit.

OPTIONS*

- E Self Diagnostics**
- TD Time Delay
- 0H No Heads
- 1H 1Head
- 3H 3 Heads (Requires largest enclosure)
- ML Metal Heads
- WCS Weather proof cord and Plug (120 VAC)
- NI Nickel Cadmium Battery (up to 54 watts @ 6 volts, and up to 100 watts @ 12 volts)
- HTR1 Heater - 120 Volts
- HTR2 Heater - 277 Volts
- TC Tuff Coat Shatter proof Lenses

* Some options may affect the ETL listing
 ** Not available in 12 volt NiCad units
 Note : All product specifications are subject to change without notice

SELF-TEST / DIAGNOSTIC (Optional)

- Microprocessor controlled state of the art self-diagnostic system
- Automatic 15 minute monthly and 90 minute yearly discharge tests
- Visual and Audible indicators for the following conditions:
 - Transfer failure
 - Charger malfunction
 - Defective battery

DIMENSIONS

Models	Length (in)	Height (in)*	Width (in)
18 and 36 watts	10	14	4
54 and 75 watts	12	16	6
100 watts	14	18	6

* Measured to the top of the lighting heads.

STANDARD FEATURES

- UL listed Type 4X, 12, 6P and 13 polycarbonate gray (RAL7035) enclosure
- Designed for non-hazardous applications
- Ideal for parking garages, car washes and outdoor areas
- Available in 6 and 12 volt models
- Up to 100 watts capacity
- Universal 120/277volt input
- The solid state charging technology is current limited, and is provided with
- Low voltage disconnect,
- AC lockout and brownout protection
- Overload and short circuit protection.
- Test switch and charge indicator
- Premium, maintenance-free, valve regulated sealed lead calcium battery
- Minimum of 90 minutes of emergency time
- Standard with two Par36 type heads with choice of lamps
- Matching remote heads available
- MADE IN THE USA

AGENCY APPROVALS

ETL Listed to UL924.
 Meets or exceeds the requirements of the National Electrical Code and NFPA 101.

WARRANTY

One year warranty from date of shipment on entire unit. Battery will carry additional pro-rata warranty. See Warranty Statement for details.