


Fixture Type:	
Model Number:	
Project:	

RCEW Series Recessed Steel Exit Signs




ORDERING GUIDE

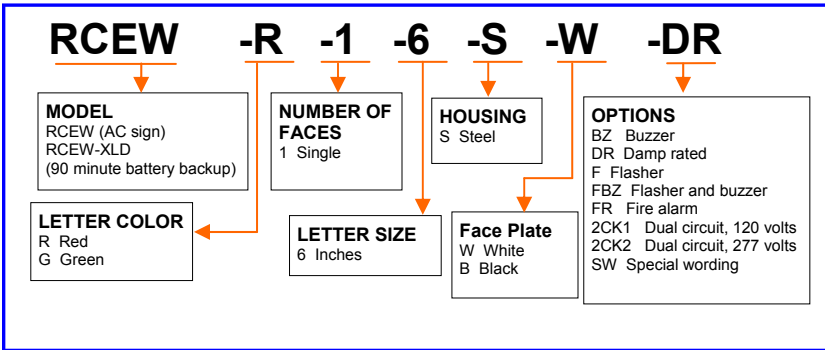

SPECIFICATIONS

Construction	Heavy duty steel construction finished in a bright white finished face plate
Installation	For recessed wall applications only
Illumination	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
Electronics	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
Power Consumption	Red 3.5/4.2 watts @ 120/277 volts Green 7.9/8.4 watts @ 120/277 volts
Battery	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
Code Compliance	ETL Listed to UL924. Meets or exceeds the requirements of the National Code and NFPA101
Warranty	One year warranty from date of shipment on entire unit. 7 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

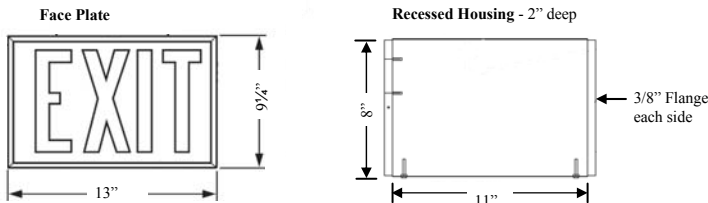

STANDARD FEATURES All Models

- Universal 120/277 volt 60 Hz field selectable input
- Heavy duty steel construction
- Easy to install
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters
- White face plate (Black is optional)
- Snap-out, chevron type, directional arrows.
- Recessed wall applications only

Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Operating range 68°F to 86°F
- MADE IN THE USA