


Fixture Type:	
Model Number:	
Project:	

SLBU Series Steel LED Emergency Lighting




ORDERING GUIDE

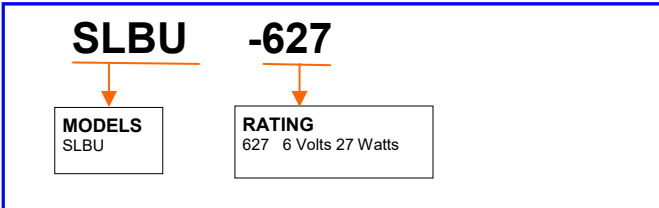

ILLUMINATION

- Two, 6V, 1.0W adjustable square LED lamp heads in engineering grade, high-impact resistant thermoplastic
- Compatible with any 6 volt remote heads
- Adjustable lamp heads provide optimal center-to-center spacing
- Runs up to 8 hours without remote heads
- 25 watts of remote capacity standard

DIMENSIONS

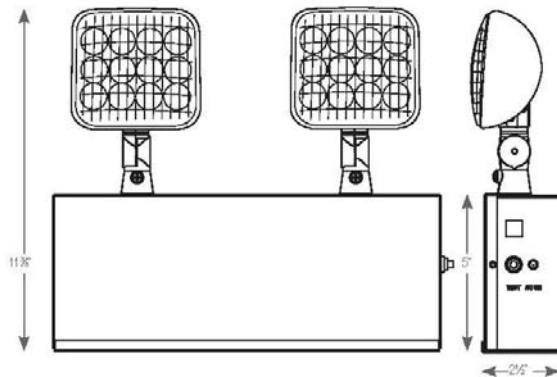

STANDARD FEATURES

- Durable 20ga steel housing in a bright white finish.
- Universal 120/277 volt 60 Hz input
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads
- Low battery voltage disconnect
- AC lockout
- Brownout protection
- Charge / Ready LED indicator
- Test switch
- 6 volts sealed lead calcium battery
- Minimum 90 minutes of emergency illumination.
- Knock outs in the back of the unit for wall mounting

AGENCY APPROVALS

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

UL listed for damp locations. (20°C – 40°C)

WARRANTY

Five year warranty on all electronics and housing. Battery is pro-rated for two years.