


Fixture Type:	
Model Number:	
Project:	

WL Series Wet Location Exit Signs

ORDERING GUIDE

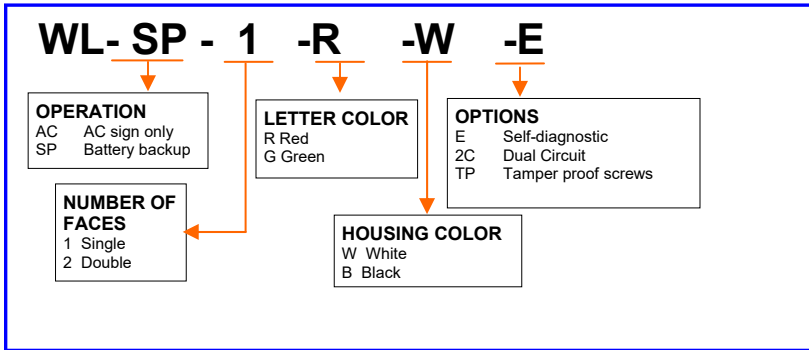

STANDARD FEATURES All Models

- Universal 120/277 volt 60 Hz field selectable input
- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters

Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Cold location listed STANDARD, -20° to 50° C
- Self diagnostics circuitry is available (Optional)

SPECIFICATIONS

Construction	Housing is constructed of injection molded, engineering grade, 5VA flame retardant thermoplastic
Installation	Canopy is supplied with all models for end, or ceiling mount.
Illumination	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
Electronics	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
Power Consumption	Red 3.8 watts @ 120/277 volts Green 3.8 watts @ 120/277 volts
Battery	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
Code Compliance	UL924 Listed for cold /wet locations (-20°C to 50°C) Meets NFPA and NEC guidelines
Warranty	One year warranty from date of shipment on entire unit. 5 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

