


Fixture Type:	
Model Number:	
Project:	

## X Series Commercial Grade Thermoplastic Exit Signs


### ORDERING GUIDE

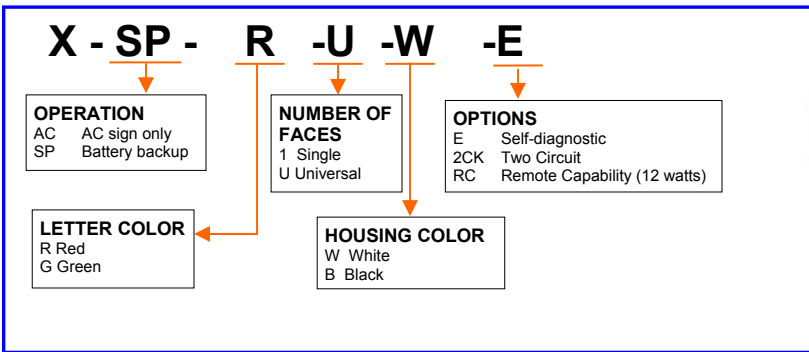

### SPECIFICATIONS

<b>Construction</b>	Housing is constructed of injection molded, engineering grade, 5VA flame retardant thermoplastic
<b>Installation</b>	Canopy is supplied with all models for wall, end, or ceiling mount.
<b>Illumination</b>	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
<b>Electronics</b>	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
<b>Power Consumption</b>	Red 3.8 watts @ 120/277 volts Green 3.8 watts @ 120/277 volts
<b>Battery</b>	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
<b>Code Compliance</b>	UL924 and Damp location listed. Meets NFPA and NEC guidelines
<b>Warranty</b>	One year warranty from date of shipment on entire unit. 5 year pro rata warranty on the batteries. See Warranty Statement for details.

### DIMENSIONS



### STANDARD FEATURES All Models

- Universal 120/277 volt 60 Hz field selectable input
- Injection molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Easy to install snap together construction
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters
- White housing, black is optional
- Snap-in, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available in single face or universal models

### Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Damp location listed, 0° to 50° C