


Fixture Type:	
Model Number:	
Project:	

DX8 Series Commercial Grade NYC Cast Aluminum Exit Signs

ORDERING GUIDE

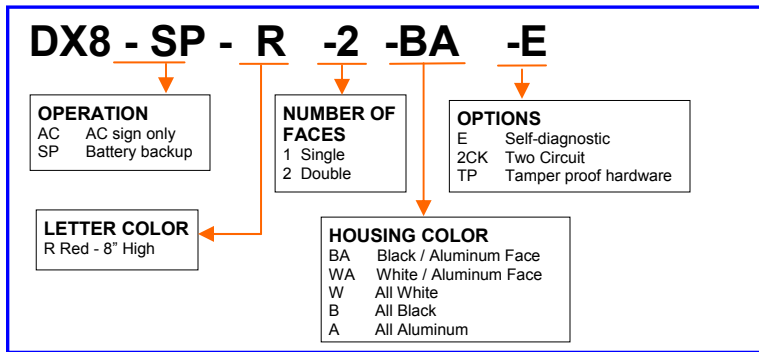

STANDARD FEATURES

All Models

- Universal 120/277 volt 60 Hz field selectable input
- Precision molded die-cast aluminum housing
- Fine grain brushed aluminum face with clear lacquer finish
- Easy to install snap together construction
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red 8 inches high letters
- Optional all white or black housing
- Snap-in, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available in single face or double face models
- Unique design allows for double face conversion in the field

Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Damp location listed, 0° to 50° C

SPECIFICATIONS

Construction	Precision molded, die-cast aluminum housing
Installation	Canopy is supplied with all models for wall, end, or ceiling mount.
Illumination	All models are illuminated with high intensity red LEDs and meet UL requirements for uniformity.
Electronics	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
Power Consumption	Red 3.2 / 3.6 watts @ 120/277 volts
Battery	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
Code Compliance	UL924 and Damp location listed. (0°C to 50°C) Meets or exceeds NFPA and NEC guidelines
Warranty	One year warranty from date of shipment on entire unit. 5 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

