


Fixture Type:	
Model Number:	
Project:	

CEW Series Architectural Emergency Lighting



ORDERING GUIDE

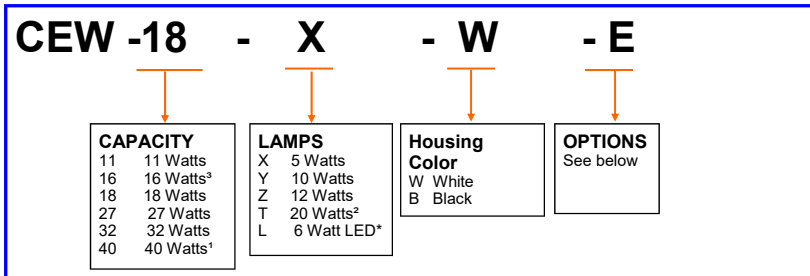

STANDARD FEATURES

- Attractive contemporary design
- Compact, low profile
- UV stable, high impact, injection molded, V-O flame resistant housing
- Can be wall or ceiling mounted
- Universal 120/277 volt 60 Hz input - other voltages available upon request
- Fully automatic solid state charger returns battery to full charge according to UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout
- Brownout protection.
- High charge LED indicator.
- Test switch
- Long life maintenance free valve regulated lead acid battery
- Minimum of 90 minutes of emergency illumination.
- Supplied with two MR16 heads
- Remote test is available and requires an Infra Red hand held tester.
- **MADE IN THE USA**

AGENCY APPROVALS

ETL Listed to UL924.
Meets or exceeds the requirements of the National Electrical Code and NFPA 101.

WARRANTY

One year warranty from date of shipment on entire unit. Battery will carry additional pro-rata warranty. See Warranty Statement for details.

OPTIONS


RT	Remote Test
E	Self Diagnostics
CP	Cord and Plug (120 VAC)
NI	Nickel Cadmium Battery (16 and 27 watts only)
DR	Damp Rating

SELF-TEST / DIAGNOSTIC (Optional)

- Microprocessor controlled state of the art self-diagnostic system
- Automatic 15 minute monthly and 90 minute yearly discharge tests
- Visual and Audible indicators for the following conditions:
 - Transfer failure
 - Charger malfunction
 - Defective battery
 - Burnt out lamp

RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote required, not included.



DIMENSIONS

12³/₄"L x 5"H x 5¹/₂"W

^{*} Only available on CEW40 models
¹ 12 volt unit, 40 watt equivalent, 32 watts capacity
² 20 Watt light output equivalent -16 watts lamp
³ NICAD Models only