


Fixture Type:	
Model Number:	
Project:	

EL-NYR Series Combination Steel Exit Signs


ORDERING GUIDE

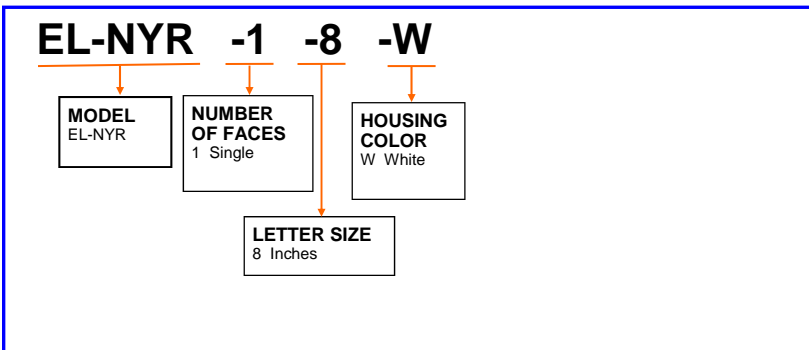

SPECIFICATIONS

Construction	Heavy duty steel construction finished in a bright white paint.
Installation	Hardware provided for wall mount. Top and side knock outs provided for conduit entry
Illumination	All models are illuminated with high intensity red LEDs and meet UL requirements for uniformity.
Electronics	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
Power Consumption	Red 12.7/14.3 watts @ 120/277 volts
Battery	Sealed lead calcium battery provides a minimum of 90 minutes of emergency operation
Code Compliance	Meets or exceeds the requirements of the National Electrical Code and NFPA101. Meets UL924
Warranty	One year warranty from date of shipment on entire unit. 2 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

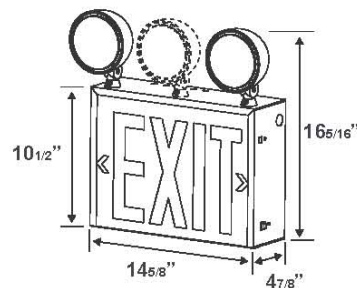

STANDARD FEATURES

All Models

- Universal 120/277 volt 60 Hz field selectable input
- Heavy duty steel construction
- Easy to install
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red Exit letters
- White housing
- Snap-out, chevron type, directional arrows.
- Back wall mounting design
- Available in single face models only
- Sealed lead calcium maintenance free battery
- 90 minutes of emergency illumination
- Supplied standard with three 12 watt heads
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- UL listed for damp locations
- Operating range 20°C to 50°C