


Fixture Type:	
Model Number:	
Project:	

NXLED Series Wet Location Exit Sign



ORDERING GUIDE

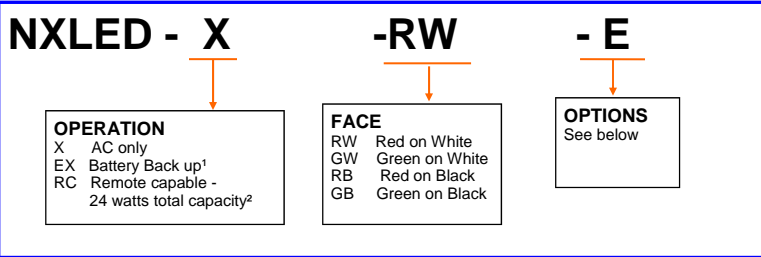

¹ Uses a sealed nickel cadmium battery
² Uses a sealed lead calcium battery

OPTIONS

- E Self Diagnostics
- TD Time Delay
- 8NY 8 inch letters (NYC Code)
- 1H 1 Top mounted Head*
- 2H 2 Top Mounted Heads*
- 3H 3 Top Mounted Heads*
- SM Side mounted heads
- WCS Weather proof cord and Plug (120 VAC)
- NI Nickel Cadmium Battery (EX model only)
- HTR1 Heater - 120 Volts
- HTR2 Heater - 277 Volts
- TC Tuff Coat - Shatter proof lamps

* Requires RC option

SELF-TEST / DIAGNOSTIC (Optional)

- Microprocessor controlled state of the art self-diagnostic system
- Automatic 15 minute monthly and 90 minute yearly discharge tests
- Visual and Audible indicators for the following conditions:
 - Transfer failure
 - Charger malfunction
 - Defective battery
 - Burnt out lamp

DIMENSIONS

Models	Length (in)	Height (in)	Width (in)
NXLED-EX	14	12	6
NXLED-RC	14	12	6
NXLED-8NY	16	14	7



STANDARD FEATURES

- UL listed Type 4X, 12, 6P and 13 polycarbonate gray (RAL7035) enclosure
- Designed for non-hazardous applications
- Ideal for parking garages, car washes and outdoor areas
- Available in AC models or with battery back up
- Up to 20 watts of remote capacity
- Universal 120/277volt input
- The solid state charging technology is current limited, and is provided with
- Low voltage disconnect,
- AC lockout and brownout protection
- Overload and short circuit protection.
- Test switch and charge indicator
- Available with choice of battery
- Minimum of 90 minutes of emergency time
- Available with Par36 type heads with choice of lamps
- Matching remote heads available
- MADE IN THE USA

AGENCY APPROVALS

ETL Listed to UL924.
 Meets or exceeds the requirements of the National Electrical Code and NFPA 101.

WARRANTY

One year warranty from date of shipment on entire unit. Battery will carry additional pro-rata warranty. See Warranty Statement for details.