


Fixture Type:	
Model Number:	
Project:	

## T Series NEMA4X and NSF Rated Exit Signs


### ORDERING GUIDE

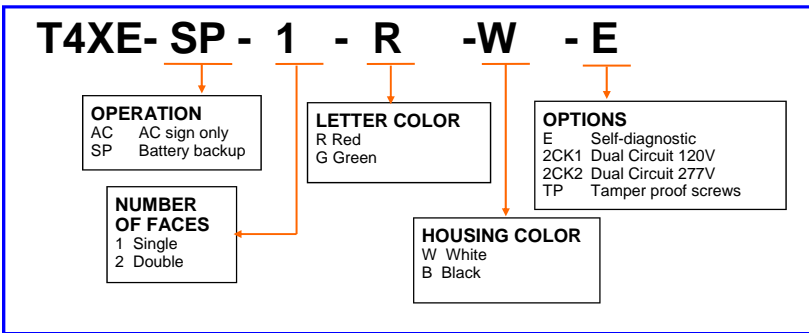

### SPECIFICATIONS

<b>Construction</b>	Housing is reinforced polycarbonate housing in white or black finish
<b>Installation</b>	Canopy is supplied with all models for wall, end, or ceiling mount applications
<b>Illumination</b>	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
<b>Electronics</b>	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
<b>Power Consumption</b>	All models 3 watts @ 120/277 volts
<b>Battery</b>	4.8 volts Sealed NiCad battery provides a minimum of 90 minutes of emergency operation
<b>Code Compliance</b>	NEMA4X, IP66 and NSF rated. Certified to CEC title 20 Meets UL924 and NFPA101 Life Safety Codes
<b>Warranty</b>	One year warranty from date of shipment on entire unit. 5 year pro rata warranty on the batteries. See Warranty Statement for details.

### DIMENSIONS

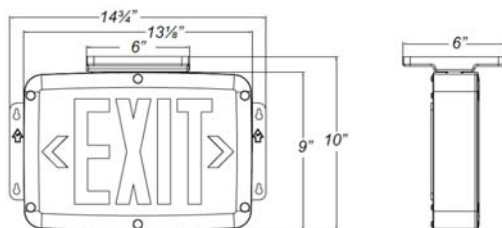

### STANDARD FEATURES

#### All Models

- Universal 120/277 volt 60 Hz field selectable input
- 5VA flame retardant, UV-stabilized polycarbonate in white or black finish.
- Corrosion-resistant enclosure with one piece, high impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- UL listed for wet locations (-20° to 50° C)
- UL certified for use in food service operation

#### Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state two rate charger recharges battery within 24 hours
- Solid state relay supervision
- Bi-color LED indicator alerts occupant on battery condition; Green-normal, Red-check battery
- Charge rate/power "ON" LED indicator and momentary magnetic test switch.
- Self diagnostics circuitry is available (Optional)