


Fixture Type:	
Model Number:	
Project:	

T Series LED MR16 NEMA4X NSF Rated Emergency Lighting

ORDERING GUIDE

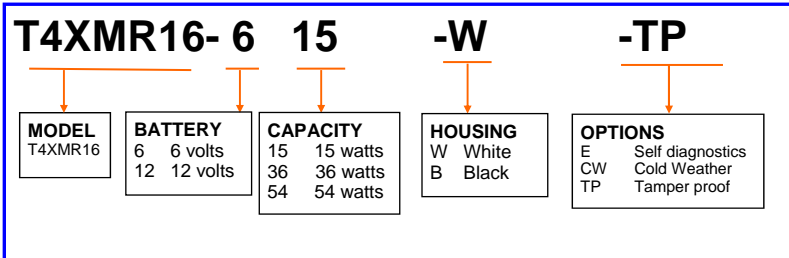

OPTIONS

- E - Self diagnostics
- CW - Heater and battery blanket for extreme cold applications (-25°C to 40°C)
- TP - Tamper proof hardware


ILLUMINATION

- Long lasting, efficient, round fully adjustable lamp heads.
- Supplied with two ultra bright 3.3 watt MR16 base LED lamps
- Adjustable lamp heads provide optimal center-to-center spacing

HOUSING

- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockout's provided for conduit feed applications.

DIMENSIONS

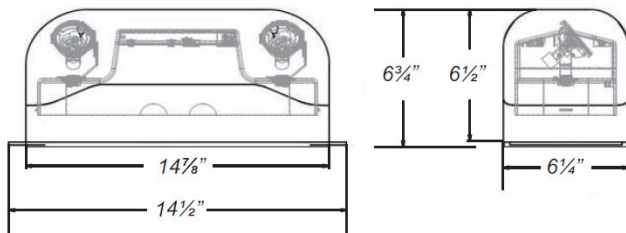

STANDARD FEATURES

- Universal 120/277 volt 60 Hz input
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads
- Bi-color LED status light indicates battery capacity - Green = normal; Red = check battery
- Charge rate/ power "ON" LED indicator and magnetic test switch
- 6 or 12 volts sealed NiCad battery (15W models)
- 6 or 12 volts sealed lead calcium battery (36W and 54W)
- Remote capacity standard on all models
- Minimum 90 minutes of emergency illumination.
- Wall mount via universal knockouts on the back

AGENCY APPROVALS

- Meets UL924, NFPA101 Life Safety Code, NEC,
- OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- NEMA4X rated.
- UL certified for use in food service operations.
- UL listed for wet locations (0°C - 50°C on 15W and 10°C - 40°C on 36W / 54W models).

WARRANTY

Five year warranty on all electronics and housing. Battery is pro-rated for two years.