


Fixture Type:	
Model Number:	
Project:	

## PFX Series Thermo Plastic Edge Lit Exit Signs


### ORDERING GUIDE

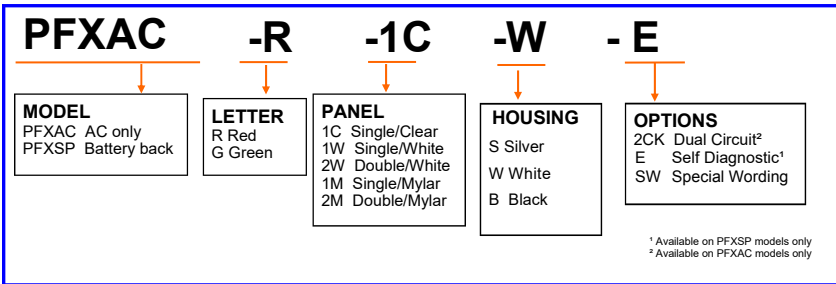

### SPECIFICATIONS

<b>Construction</b>	Injection-molded, engineered grade, 5VA flame retardant high impact resistant, thermoplastic housing, in silver, black or white finishes.
<b>Installation</b>	Thermo plastic mounting canopy included for top, end or back Mount.
<b>Illumination</b>	All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.
<b>Electronics</b>	Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.
<b>Power Consumption</b>	All models - 3.8watts @ 277 volts
<b>Battery</b>	Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
<b>Code Compliance</b>	Listed to UL924. Meets or exceeds the requirements of the National Code and NFPA101
<b>Warranty</b>	One year warranty from date of shipment on entire unit. 7 year pro rata warranty on the batteries. See Warranty Statement for details.

### DIMENSIONS

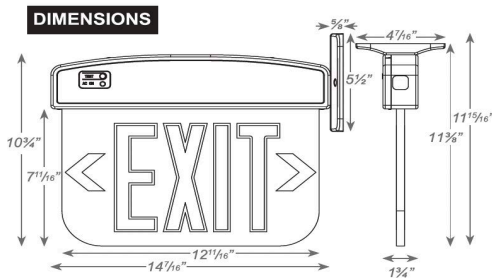

### STANDARD FEATURES

#### All Models

- Universal 120/277 volt 60 Hz field selectable input.
- Engineered grade thermo plastic housing.
- Easy to install construction.
- Low profile housing.
- Long Life LED lamps provide bright and even illumination.
- Low power consumption.
- Red or Green Exit letters.
- Available in optional White or Black housing.
- Stick on, chevron type, directional arrows.
- Wall, ceiling or end mounting.
- Single or double face models.

#### Emergency Models

- Premium nickel cadmium maintenance free battery.
- 90 minutes of emergency illumination.
- Fully automatic solid state charger.
- Recharge times as per UL guidelines.
- Solid state relay supervision.
- Low battery voltage disconnect.
- AC lockout circuit reduces installation time.
- Brownout protection.
- AC ready LED indicator.
- Momentary test switch.
- UL listed for damp locations - 0°C to 50°C

### OPTIONS

- E-Self-diagnostic feature performs monthly biannual and annual tests.
- 2CK 120V/2C-277V: Voltage -specific dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.
- SW- Special wording.