


| | |
|---------------|--|
| Fixture Type: | |
| Model Number: | |
| Project: | |

CCB Series Decorative Steel Emergency Lighting



ORDERING GUIDE

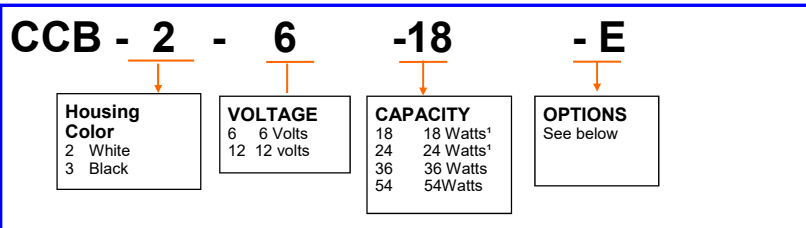

¹ 6 volt models only

OPTIONS

| | |
|------|-------------------------|
| RT | Remote Test |
| E | Self Diagnostics** |
| TD | Time Delay |
| 0H | No Heads |
| ML | Metal Heads |
| P18 | Par18 Heads |
| SQ | Rectangular Heads |
| CP | Cord and Plug (120 VAC) |
| NI | Nickel Cadmium Battery |
| MR16 | MR16 Heads |


** Not available in 12 volt NiCad units

SELF-TEST / DIAGNOSTIC (Optional)



- Microprocessor controlled state of the art self-diagnostic system
- Automatic 15 minute monthly and 90 minute yearly discharge tests
- Visual and Audible indicators for the following conditions:
 - Transfer failure
 - Charger malfunction
 - Defective battery

RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote (IRT) not included.



DIMENSIONS

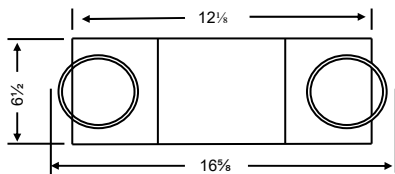

STANDARD FEATURES

- Universal 120/277 volt 60 Hz input - other voltages available upon request
- Fully automatic solid state charger returns battery to full charge according to UL guidelines
- Easy installation with front access to all components
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout
- Brownout protection.
- High charge and AC ready LED indicators.
- Test switch
- Long life maintenance free valve regulated lead acid battery
- Minimum of 90 minutes of emergency illumination.
- Heavy duty steel construction with a bright white finish. (Other colors available)
- Supplied with two front mounted PAR36 type heads with 7.2 watt wedge base lamps.
- Remote test is available and requires an infrared hand held tester.
- **MADE IN THE USA**

AGENCY APPROVALS

ETL Listed to UL924.
Meets or exceeds the requirements of the National Electrical Code and NFPA 101.

WARRANTY

One year warranty from date of shipment on entire unit. Battery will carry additional pro-rata warranty. See Warranty Statement for details.