


Fixture Type:	
Model Number:	
Project:	

# **ATC-NYC Series** Combination Steel Exit Signs



#### **ORDERING GUIDE**

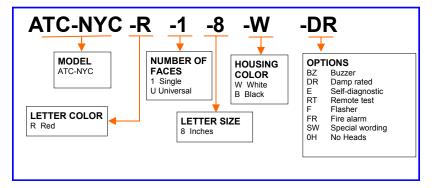

#### **SPECIFICATIONS**

Construction Heavy duty steel construction finished in a bright white

paint.

Installation Canopy is supplied with all models for wall, end, or

ceiling mount.

Illumination All models are illuminated with high intensity red

LEDs and meet UL requirements for uniformity.

**Electronics** Universal 120/277 volts 60hz input. AC lock out and low

voltage disconnect.

Power Red 3.5/4.2 watts @ 120/277 volts

Consumption

Sealed lead calcium battery provides a minimum of 90 **Battery** 

minutes of emergency operation

Code ETL Listed to UL924. Meets or exceeds the requirements Compliance

of the National Code and NFPA101


Warranty One year warranty from date of shipment on entire unit. 7

year pro rata warranty on the batteries. See Warranty

Statement for details.


## **DIMENSIONS**





### RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote required, not included.





## STANDARD FEATURES **All Models**

- Universal 120/277 volt 60 Hz field selectable
- Heavy duty steel construction
- Easy to install
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red Exit letters
- White housing (Black is optional)
- Snap-out, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available in single face or universal models.
- Sealed lead calcium maintenance free battery
- 90 minutes of emergency illumination
- Up to 36 watts capacity
- Standard with two front mounted heads with 9 watt lamps (lamp code 04)
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Operating range 68°F to 86°F
- Self diagnostics circuitry is available (Optional)
- Remote test (Optional)
- MADE IN THE USA

Carpenter Emergency Lighting

Phone: 609-689-3090 Fax: 609-689-3091

2 Marlen Dr., Hamilton, NJ 08691 www.carpenterlighting.com