


Fixture Type:	
Model Number:	
Project:	

CEW NYC Series Steel Exit Signs



ORDERING GUIDE

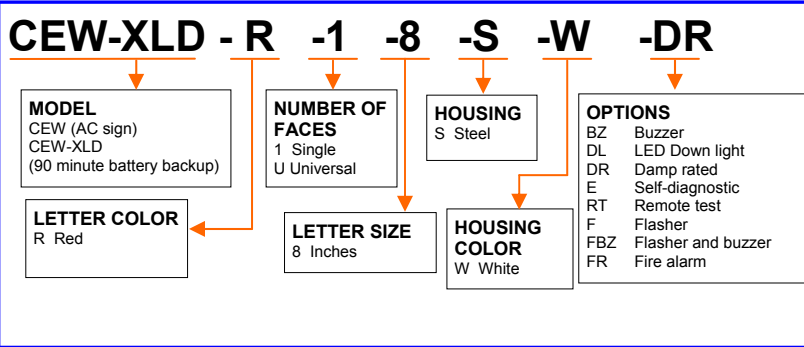

SPECIFICATIONS

Construction Heavy duty steel construction finished in a powder coat paint.

Installation Canopy is supplied with all models for wall, end, or ceiling mount.

Illumination All models are illuminated with high intensity red LEDs and meet UL requirements for uniformity.

Electronics Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.


Power Consumption Red 3.5/4.2 watts @ 120/277 volts
Green 7.9/8.4 watts @ 120/277 volts

Battery Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation

Code Compliance ETL Listed to UL924. Meets or exceeds the requirements of the National Code and NFPA101. NYC approved


Warranty One year warranty from date of shipment on entire unit. 7 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

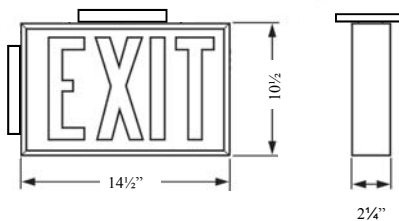

RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote required, not included.



Canopy Dimensions:

5"L x 4 1/4"W x 1/2"H

STANDARD FEATURES

All Models

- Universal 120/277 volt 60 Hz field selectable input
- Heavy duty steel construction
- Easy to install
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red 8 inch high Exit letters - NYC approved
- White housing
- Snap-in, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available in single face or universal models.

Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Operating range 68°F to 86°F
- Self diagnostics circuitry is available (Optional)
- Remote test (Optional)
- MADE IN THE USA